


Product Data Sheet

Irrigation Unit B 32

Order No. 4031

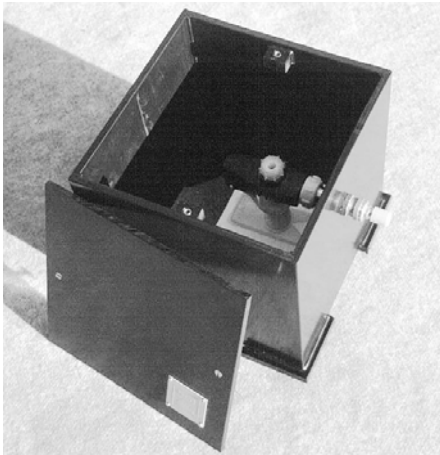

Inspection chamber/Irrigation unit for intensive green roof build-ups.



Technical Data

Irrigation Unit B 32

Made of 100% polyethylene with large, load distributing support footing. Swimmer-controlled valve for automatic dam-up irrigation. Water supply via 1/2" pipe; lockable lid.

| | |
|-------------------------------------|---------------------|
| Height: | ca. 300 mm |
| Dimensions: | ca. 300 mm x 300 mm |
| Weight: | ca. 7.0 kg |
| Colour: | black |
| Maximum permissible water pressure: | 6 bar (87 psi) |
| Minimum permissible water pressure: | 1.2 bar (17 psi) |
| Adjustable dam-up height: | ca. 30–100 mm |
| Adjustment range: | ca. 20 mm |

Accessories:

| | |
|-----------------|----------------|
| Extension Piece | Order No. 4016 |
| Height: | ca. 150 mm |


Also available in stainless steel upon request.

Features

- tested and proven swimmer-controlled automatic irrigation unit
- water-bearing materials made of moisture-resistant components
- durable functionality due to dirt filter in the pipe connection
- easy installation and maintenance
- lockable lid
- large load distributing support footing
- stable plastic body

Application Example

"Roof Garden with FD 60"

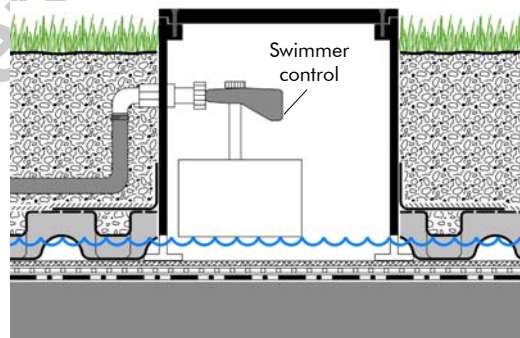

Specification Suggestion

Irrigation unit made of 100% polyethylene, swimmer controlled; lockable lid, maximum permissible water pressure 6 bar (87 psi), minimum permissible water pressure 1.2 bar (17 psi), height ca. 300 mm, Dimensions ca. 300 x 300 mm, delivery and installation

according to manufacturer's instructions including all additional connecting parts.

Make: ZinCo Irrigation Unit B 32
Enquiries: ZinCo GmbH,
Phone: +49 7022 6003-0